


过渡接头 ADAPTER

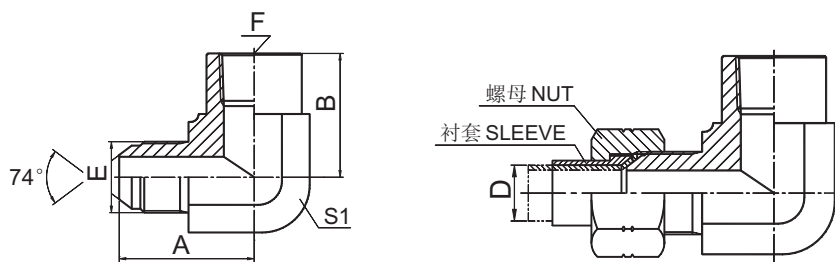

5JT9

90° JIC 外螺纹 74° 外锥 / 英锥管内螺纹
90° JIC MALE 74° CONE/BSPT FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS					
	E	F	A	B	S1			
5JT9-04-02	7/16"x20	Rc1/8"X28	27.5	20	16			
5JT9-04	7/16"x20	Rc1/4"X19	30	25	19			
5JT9-05-04	1/2"X20	Rc1/4"X19	30	25	19			
5JT9-06	9/16"X18	Rc3/8"X19	33.5	27	24			
5JT9-06-04	9/16"X18	Rc1/4"X19	30.5	25	19			
5JT9-08	3/4"X16	Rc1/2"X14	39.5	31.5	30			
5JT9-08-06	3/4"X16	Rc3/8"X19	36	27	24			
5JT9-10-08	7/8"X14	Rc1/2"X14	42.5	31.5	30			
5JT9-12	1.1/16"X12	Rc3/4"X14	48	37	33			
5JT9-12-08	1.1/16"X12	Rc1/2"X14	46.2	31.5	30			
5JT9-16	1.5/16"X12	Rc1"X11	54	43	41			
5JT9-20	1.5/8"X12	Rc1.1/4"X11	62	46	50			
5JT9-24	1.7/8"X12	Rc1.1/2"X11	74.5	55	63			

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.