



过渡接头 ADAPTER

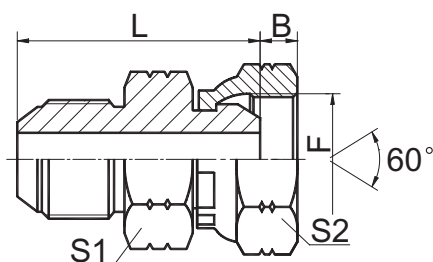

2JU

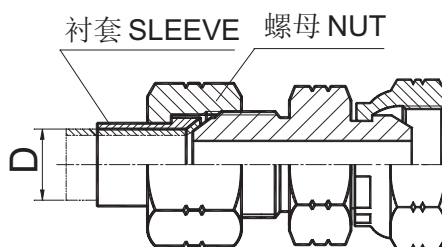

2JU-RN

JIC 外螺纹 74° 外锥 / 美制 NPSM 内螺纹 60° 外锥
 JIC MALE 74° CONE/NPSM FEMALE 60° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS					
	E	F	A	B	L	S1	S2	
2JU-04-02	7/16"X20	1/8"X27	14	3.5	29	14	15	
2JU-04	7/16"X20	1/4"X18	14	4.6	31	12	19	
2JU-04-06	7/16"X20	3/8"X19	14	6	32.5	17	22	
2JU-05-02	1/2"X20	1/8"X27	14	3.5	29	14	15	
2JU-05-04	1/2"X20	1/4"X18	14	4.6	31	14	19	
2JU-06	9/16"X18	3/8"X19	14.1	6	32.5	17	22	
2JU-06-04	9/16"X18	1/4"X18	14.1	4.6	31	17	19	
2JU-06-08	9/16"X18	1/2"X14	14.1	7.5	34	19	27	
2JU-08	3/4"X16	1/2"X14	16.7	7.5	38.5	22	27	
2JU-08-04	3/4"X16	1/4"X18	16.7	4.6	35.5	22	19	
2JU-08-06	3/4"X16	3/8"X19	16.7	6	37	22	22	
2JU-08-12	3/4"X16	3/4"X14	16.7	8.9	42	27	32	
2JU-10-08	7/8"X14	1/2"X14	19.3	7.5	41	24	27	
2JU-12-08	1.1/16"X12	1/2"X14	21.9	7.5	46	30	27	
2JU-12	1.1/16"X12	3/4"X14	21.9	8.9	47	30	32	
2JU-12-16	1.1/16"X12	1"X11.5	21.9	10.5	49.5	32	41	
2JU-16	1.5/16"X12	1"X11.5	23.1	10.5	51	36	41	
2JU-20-16	1.5/8"X12	1"X11.5	24.3	10.5	53.5	46	41	
2JU-20	1.5/8"X12	1.1/4"X11.5	24.3	11.2	55.5	46	50	
2JU-24-20	1.7/8"X12	1.1/4"X11.5	27.5	11.2	61	50	50	
2JU-24	1.7/8"X12	1.1/2"X11.5	27.5	11.2	61.5	50	55	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.