
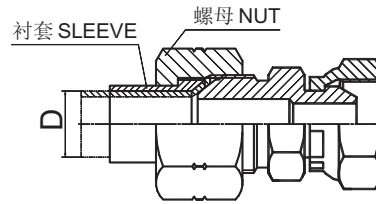


# 过渡接头 ADAPTER

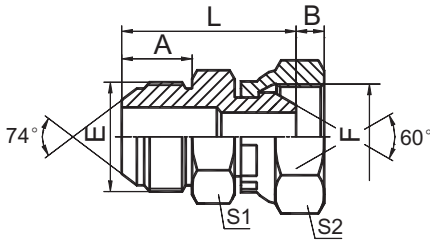

## 2JM

JIC外螺纹74°外锥/公制内螺纹60°外锥  
JIC MALE 74° CONE/METRIC FEMALE 60° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS						
	E	F			A	B	L	S1	S2
2JM-05-12	1/2"X20	M12X1.5			14	5	31	14	17
2JM-06-14	9/16"X18	M14X1.5			14.1	5.5	31.6	17	19
2JM-06-16	9/16"X18	M16X1.5			14.1	5.5	32.1	17	22
2JM-06-18	9/16"X18	M18X1.5			14.1	5.6	33.1	17	24
2JM-06-20	9/16"X18	M20X1.5			14.1	6.5	34.6	19	27
2JM-06-22	9/16"X18	M22X1.5			14.1	6	37.1	22	27
2JM-08-16	3/4"X16	M16X1.5			16.7	5.5	36.7	22	22
2JM-08-18	3/4"X16	M18X1.5			16.7	5.6	37.7	22	24
2JM-08-20	3/4"X16	M20X1.5			16.7	6.5	39.2	22	27
2JM-08-22	3/4"X16	M22X1.5			16.7	6	39.7	22	27
2JM-10-16	7/8"X14	M16X1.5			19.3	5.5	39.3	24	22
2JM-10-18	7/8"X14	M18X1.5			19.3	5.6	40.3	24	24
2JM-10-20	7/8"X14	M20X1.5			19.3	6.5	41.8	24	27
2JM-10-22	7/8"X14	M22X1.5			19.3	6	42.3	24	27

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.